

Installation Instructions for HR5 Riser Adapter


It is highly recommended that you use a thread lock compound such as Loctite brand, on all threads to keep them from vibrating loose.



Attach your handle bars or bar/riser combo to the HR5 with the hardware that came with the risers and tighten.



Place the provided 1/2" Washers into the counter bore in the top of the triple tree. Note: This keeps the HR5 off of the surface of your triple tree and gives clearance for the riser stud.

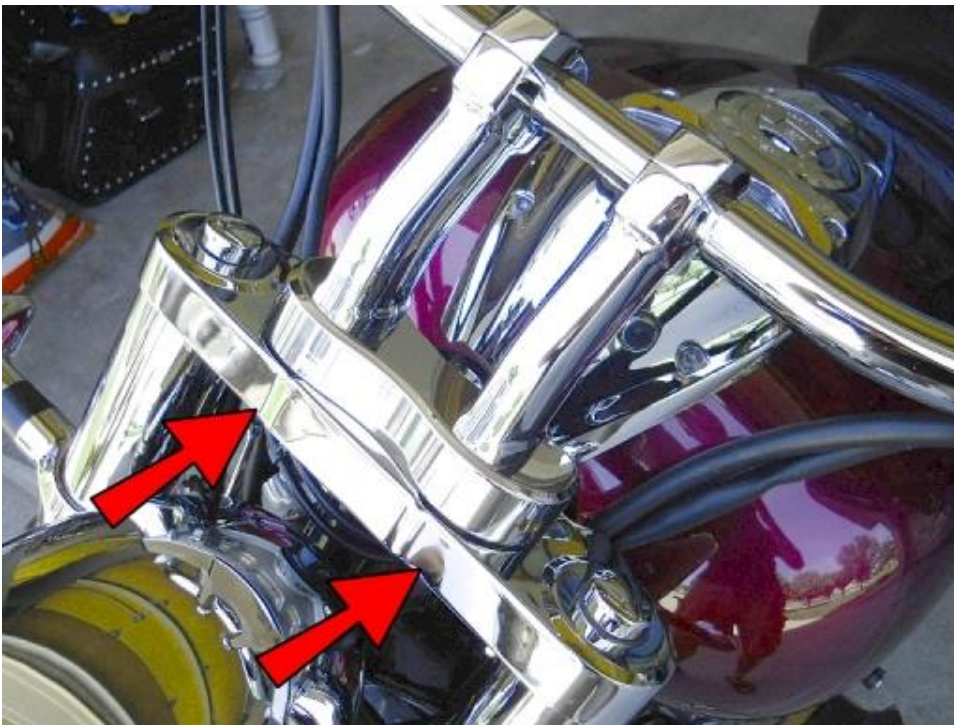

Attach the HR5 to your triple tree, from the bottom, with the provided M12 Bolts and tighten.

Reconnect any controls, wires, cables and hoses and make sure there is enough slack in them to allow sufficient movement of the handle bars.

That's it!

It is recommended that at this point you double check that ALL connections are tight and take the bike for a test ride.

Enjoy the ride!